

# HYUNDAI GENESIS 2.0T SILICONE HOSE KIT PART LIST AND INSTALL GUIDE

## PART LIST

**1PC** | MISHIMOTO SILICONE HOSE KIT

### TOOLS NEEDED

JACK + JACK STANDS	12MM SOCKET &/OR WRENCH
WRENCH & EXTENSIONS	SCREWDRIVER
10MM SOCKET &/OR WRENCH	PLIERS


### DISCLAIMER

- Please dispose of any liquids properly.
- Allow vehicle to cool completely prior to attempting installation.
- Mishimoto Performance is not responsible for any vehicle damage or personal injury due to installation errors, misuse, or removal of MP products.
- MP always suggests that a trained professional installs all MP products.
- Refill coolant system with 50/50 coolant, unless specified by the manufacturer.
- Do not run the engine or drive the vehicle while overheating. Serious damage may occur.
- Only raise vehicle up on jack stands or on a vehicle lift.

## INSTALLATION INSTRUCTIONS

### 01 | REMOVING OEM SYSTEM

1. Jack up the vehicle, pop the hood, and allow for the vehicle to cool completely.

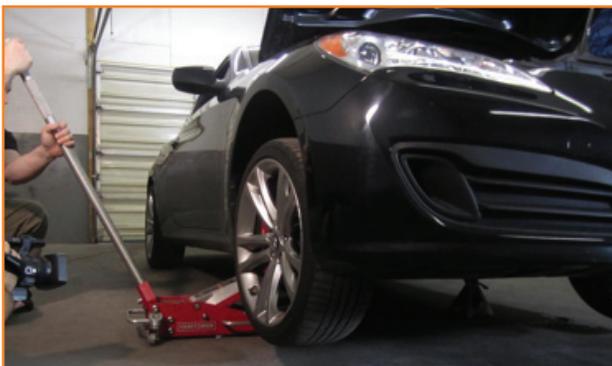

2. Loosen and remove the negative terminal of the battery.



3. Remove (4) plastic screws and (4) 10mm bolts to remove the lower splash shield.



4. Locate radiator drain plug and remove fluid from radiator. Drain into an appropriate container.



CONTINUED ON FOLLOWING PAGE →

# 01


# HYUNDAI GENESIS 2.0T SILICONE HOSE KIT PART LIST AND INSTALL GUIDE

## 01 | REMOVING OEM SYSTEM CONTINUED

5. Remove the upper radiator hose.



6. Remove the lower radiator hose.

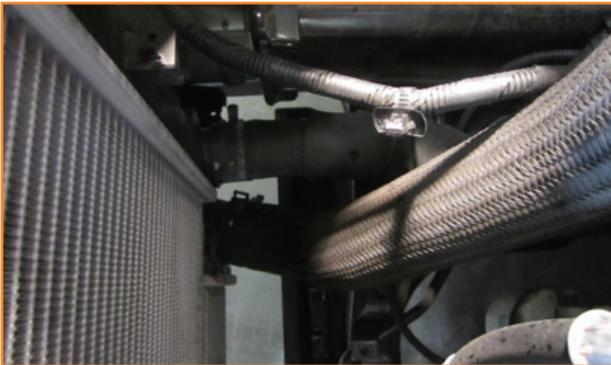

## 02 | INSTALLING MISHIMOTO HOSES

1. Install the Mishimoto silicone lower radiator hose.



2. Install the Mishimoto silicone upper radiator hose.



3. Reinstall and tighten the negative terminal of the battery. Refill coolant, check for leaks, and bleed out air by turning the vehicle on and squeezing the upper and lower radiator hoses.



4. Reinstall the (4) plastic screws and the (4) 10mm bolts to remove the lower splash shield. Lower vehicle and conduct a road test. Check for leaks in the coolant system.

# 02