



INSTALLATION GUIDE

2022+ Subaru WRX License Plate Relocation Kit

SKU: MMLP-WRX-22

TABLE OF CONTENTS

- Pg 1** RESOURCES AND CONTACT INFORMATION
- Pg 2** IMPORTANT SAFETY INFORMATION
 - SUPPLIED PARTS
 - REQUIRED TOOLS
 - INSTALLATION INSTRUCTIONS
- Pg 4** TEMPLATE
- Pg 5** DISPOSAL INSTRUCTIONS
 - WARRANTY INFORMATION

RESOURCES & CONTACT



CALL 1-877-GOMISHI

CUSTOMER SERVICE HOURS: MON-FRI 8:30AM-5:00PM EST



MISHIMOTO



GOMISHIMOTO



MISHIMOTO



WEBSITE

WWW.MISHIMOTO.COM



ENGINEERING BLOG

WWW.MISHIMOTO.COM/ENGINEERING

IMPORTANT SAFETY INFORMATION

- › Mishimoto recommends you use safety glasses and protective gloves during the installation of our products
- › Raise vehicle only on jack stands or on a vehicle lift
- › Allow vehicle to cool completely prior to attempting installation
- › Do not run the engine or drive the vehicle while overheating; serious damage can occur
- › Please dispose of any liquids properly
- › Mishimoto is not responsible for any vehicle damage or personal injury due to installation errors, misuse, or removal of Mishimoto products
- › If you need any assistance while installing our products, reach out to our Customer Service Team at 1-877-GOMISHI

SUPPLIED PARTS


- (1) THREADED ROD
- (1) LICENSE PLATE MOUNTING BRACKET
- (1) FLAT WASHER
- (1) M10 BOLT
- (4) M6 BOLTS

REQUIRED TOOLS

- TRIM REMOVAL TOOL
- 19MM SOCKET
- 16MM SOCKET
- SOCKET DRIVER
- TORQUE WRENCH
- 4MM ALLEN WRENCH
- (OPTIONAL) DRILL
- (OPTIONAL) 1-1/2" DRILL BIT OR STEPPED DRILL BIT

INSTALLATION INSTRUCTIONS

- 01.** Using a trim removal tool, remove the front tow hook cover by prying it off from the bottom. Remove the cover from the car by pushing the plastic line out of the clip.

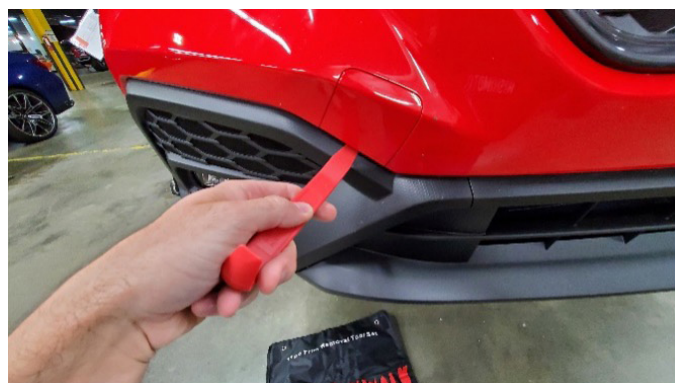

- 02.** Using a 19mm socket and driver, install the threaded rod into the tow hook hole. Tighten to 20 lb-ft.



Continued on next page

03. (This step is optional) If you do not want to drill your tow hook cover, skip to step 4. Print and cut out the attached template found on page 4. This must be printed on letter (8.5"x11") sized paper. Measure the scale on the template to ensure it was printed to the correct dimensions before cutting. Use painter's tape to protect the painted side of the cover to avoid scratching. Place the template on the backside of the tow hook cover as shown below and drill a 1-1/2" hole where marked. Reinstall the tow hook cover over the threaded rod.



04. Using a 16mm socket and driver, attach the license plate mounting bracket to the threaded rod with the flat washer and M10 bolt. Align the license plate mounting bracket in the desired orientation and tighten the bolt to 25 lb-ft.



05. Using a 4mm allen wrench, attach your license plate to the license plate mounting bracket with the (4) M6 bolts.



Congratulations! You have completed your installation.

Before:




After:



Continued on next page

WARNING:

MEASURE TO
VERIFY SCALE
45MM LONG
(1.77")

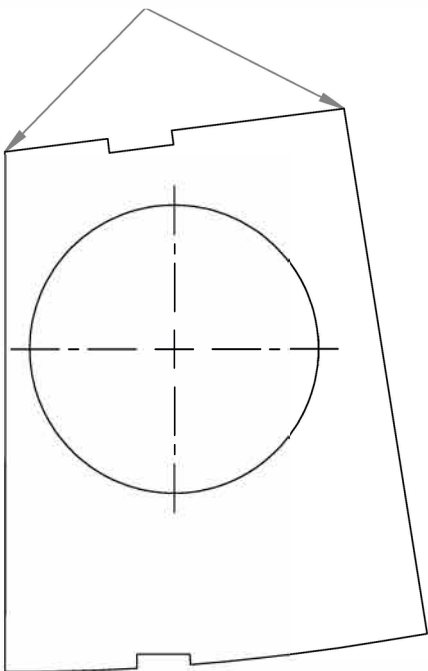

DO NOT 'scale to fit' page when printing.

DISPOSAL INSTRUCTIONS

- › Do not dispose of any product as unsorted municipal waste. Use separate collection facilities. Contact your local authority for information regarding the collection systems available.
- › Never improperly dispose of any coolant, oil, or other chemicals.

WARRANTY INFORMATION



- › All claims must be accompanied with a picture of the Mishimoto product showing the issue for which the claim is being submitted.
- › Mishimoto asks that the customer inspect their purchased item for any damage immediately upon arrival.
- › Any product deemed dead on arrival (DOA) must be claimed within 14 business days of delivery. Claims outside of this time frame will not be covered under the Mishimoto Lifetime Warranty.
- › This warranty does not include payment and/or reimbursement of the cost of labor in connection with the removal of any product returned pursuant to the warranty policy or in connection with the installation of any replacement items provided under the warranty policy.
- › Mishimoto has the right to refuse a claim at any time.

- › When Mishimoto accepts a claim, Mishimoto retains full discretion to choose if it will: (i) repair or replace purchaser's original Mishimoto product; (ii) replace purchaser's original Mishimoto product with the most current available model; or (iii) provide the purchaser with a gift card redeemable on [Mishimoto.com](https://www.mishimoto.com) in the amount of the original purchase price of the original Mishimoto product. The provision of a replacement of a Mishimoto product is subject to availability and Mishimoto retains the right to substitute any warranty claim item with a comparable item or credit at any time.
- › If Mishimoto determines that it will provide a replacement item in connection with a claim under this warranty policy, and such item is out of stock, Mishimoto will place the customer on backorder and ship the replacement product to the purchaser once it becomes available.
- › Mishimoto is not liable for incorrect shipments in connection with a claim if a claim form is completed incorrectly, or if a model number is not included in a claim.
- › If you have a vehicle equipped with an automatic transmission, please make sure to specify this within the text box on the claim form. Mishimoto is not responsible for incorrect replacement shipments if transmission type is not indicated.



WARNING
Cancer and
Reproductive Harm
www.P65Warnings.ca.gov

This product can expose you to chemicals which are known to the state of California to cause cancer. For more information visit: www.p65warnings.ca.gov